

6121 Baker Road,
Suite 108
Minnetonka, MN 55345

www.chtechnology.com



Phone (952) 933-6190
Fax (952) 933-6223

1-800-274-4284

Thank you for downloading this document from C&H Technology, Inc.

Please contact the C&H Technology team for the following questions -

Technical

Application

Assembly

Availability

Pricing


Phone – 1-800-274-4284


E-Mail – sales@chtechnology.com

INPUT RECTIFIER DIODE TO-220 FULLPAK Lead-Free ("PbF" suffix)

Description/ Features

The 20ETS..FPPbF rectifier *SAFEIR* series has been optimized for very low forward voltage drop, with moderate leakage. The glass passivation technology used has reliable operation up to 150°C junction temperature.

Typical applications are in input rectification and these products are designed to be used with International Rectifier Switches and Output Rectifiers which are available in identical package outlines. Fully isolated package ($V_{INS} = 2500 V_{RMS}$). UL E78996 approved. 



$$V_F < 1V @ 10A$$

$$I_{FSM} = 300A$$

$$V_{RRM} = 800 - 1200V$$


Output Current in Typical Applications

Applications	Single-phase Bridge	Three-phase Bridge	Units
Capacitive input filter $T_A = 55^\circ C$, $T_J = 125^\circ C$, common heatsink of $1^\circ C/W$	18	22	A

Major Ratings and Characteristics

Characteristics	Values	Units
$I_{F(AV)}$ Sinusoidal waveform	20	A
V_{RRM} range	800-1200	V
I_{FSM}	300	A
V_F @ 10 A, $T_J = 25^\circ C$	1.0	V
T_J	-40 to 150	$^\circ C$

Package Outline

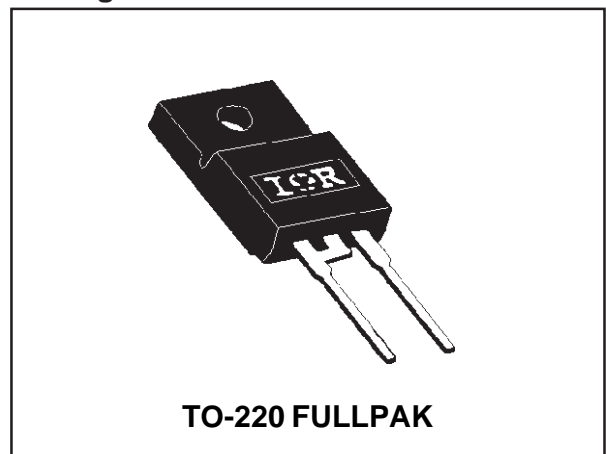

Voltage Ratings

Part Number	V_{RRM} , maximum peak reverse voltage V	V_{RSM} , maximum non repetitive peak reverse voltage V	I_{RRM} 150°C mA
20ETS08FPPbF	800	900	1
20ETS12FPPbF	1200	1300	

Absolute Maximum Ratings

Parameters	Values	Units	Conditions
$I_{F(AV)}$ Max. Average Forward Current	20	A	@ $T_C = 88^\circ\text{C}$, 180° conduction half sine wave
I_{FSM} Max. Peak One Cycle Non-Repetitive Surge Current	250	A	10ms Sine pulse, rated V_{RRM} applied
	300		10ms Sine pulse, no voltage reapplied
I^2t Max. I^2t for fusing	316	A^2s	10ms Sine pulse, rated V_{RRM} applied
	442		10ms Sine pulse, no voltage reapplied
I^2/t Max. I^2/t for fusing	4420	A^2/s	t = 0.1 to 10ms, no voltage reapplied

Electrical Specifications

Parameters	Values	Units	Conditions
V_{FM} Max. Forward Voltage Drop	1.1	V	@ 20A, $T_J = 25^\circ\text{C}$
r_t Forward slope resistance	10.4	mΩ	$T_J = 150^\circ\text{C}$
$V_{F(TO)}$ Threshold voltage	0.85	V	
I_{RM} Max. Reverse Leakage Current	0.1	mA	$T_J = 25^\circ\text{C}$
	1.0		$T_J = 150^\circ\text{C}$

$V_R = \text{rated } V_{RRM}$

Thermal-Mechanical Specifications

Parameters	Values	Units	Conditions
T_J Max. Junction Temperature Range	-40 to 150	°C	
T_{stg} Max. Storage Temperature Range	-40 to 150	°C	
R_{thJC} Max. Thermal Resistance Junction to Case	1.5	°C/W	DC operation
R_{thJA} Max. Thermal Resistance Junction to Ambient	62	°C/W	
R_{thCS} Typ. Thermal Resistance Case to Heatsink	1.5	°C/W	Mounting surface, smooth and greased
wt Approximate Weight	2 (0.07)	g (oz.)	
T Mounting Torque	Min.	6 (5)	Kg-cm (lbf-in)
	Max.	12 (10)	
Case Style	TO-220 FULLPAK		(94/V0)

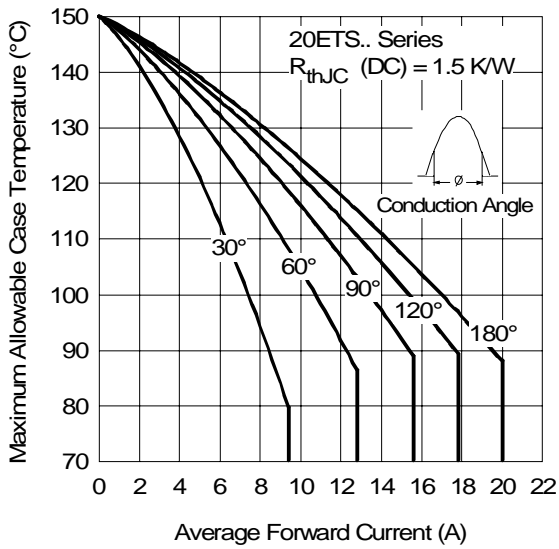


Fig. 1 - Current Rating Characteristics

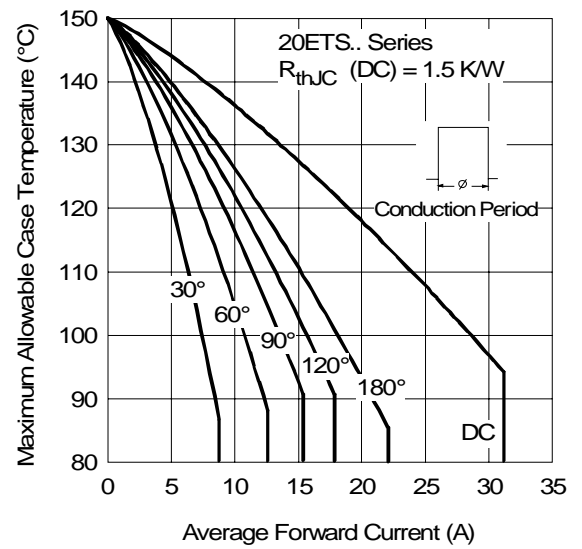


Fig. 2 - Current Rating Characteristics

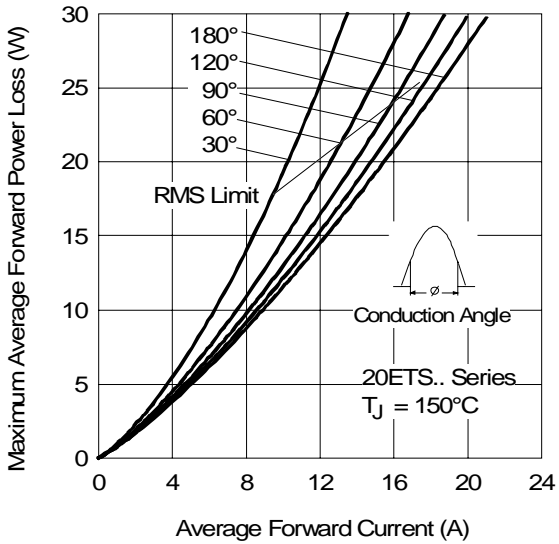


Fig. 3 - Forward Power Loss Characteristics

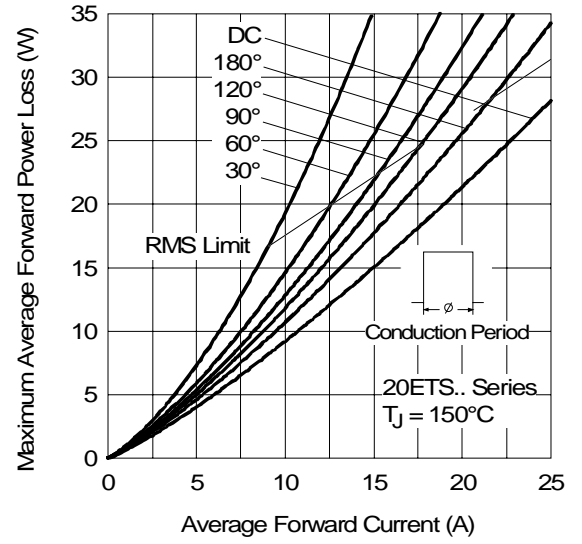


Fig. 4 - Forward Power Loss Characteristics

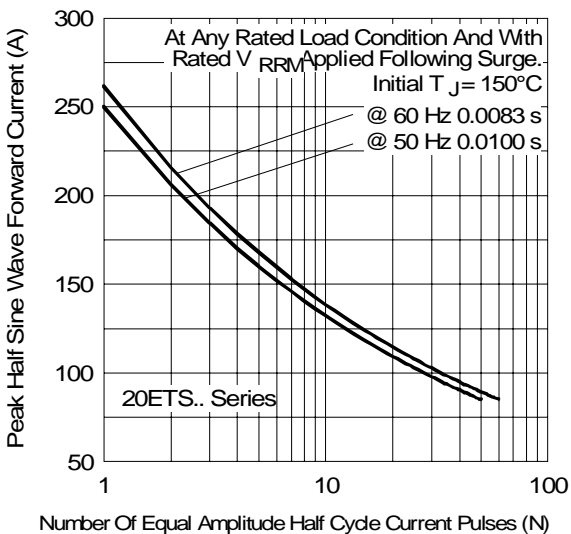


Fig. 5 - Maximum Non-Repetitive Surge Current

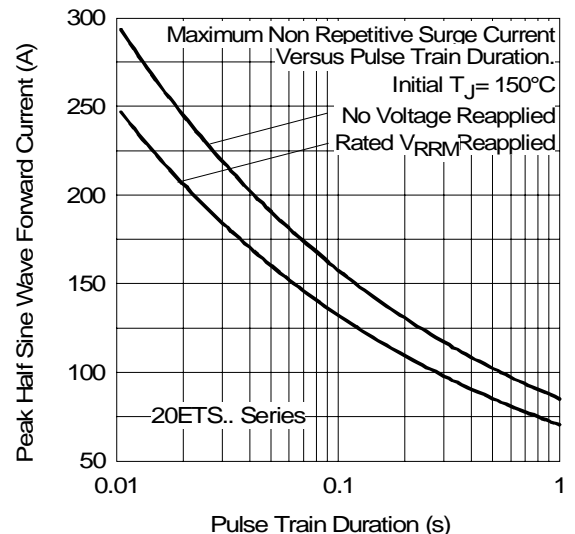


Fig. 6 - Maximum Non-Repetitive Surge Current

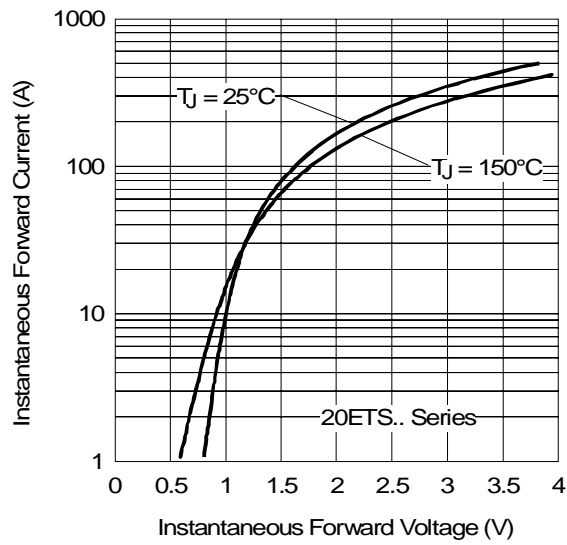


Fig. 7 - Forward Voltage Drop Characteristics

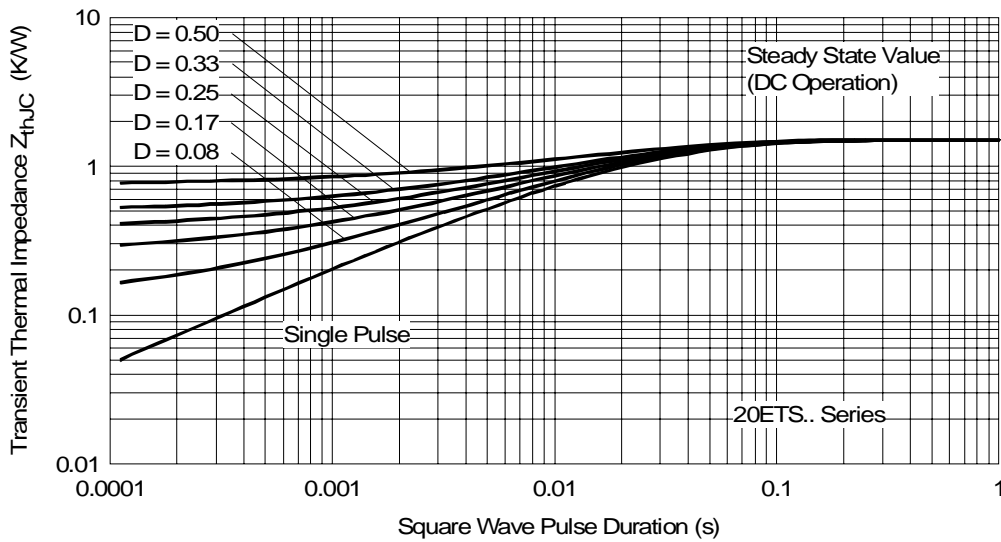


Fig. 8 - Thermal Impedance Z_{thJC} Characteristics

Ordering Information Table

Device Code																							
	<table border="1" style="margin: auto;"> <tr> <td style="padding: 5px;">20</td> <td style="padding: 5px;">E</td> <td style="padding: 5px;">T</td> <td style="padding: 5px;">S</td> <td style="padding: 5px;">12</td> <td style="padding: 5px;">FP</td> <td style="padding: 5px;">PbF</td> </tr> <tr> <td style="text-align: center;">①</td> <td style="text-align: center;">②</td> <td style="text-align: center;">③</td> <td style="text-align: center;">④</td> <td style="text-align: center;">⑤</td> <td style="text-align: center;">⑥</td> <td style="text-align: center;">⑦</td> </tr> </table>	20	E	T	S	12	FP	PbF	①	②	③	④	⑤	⑥	⑦								
20	E	T	S	12	FP	PbF																	
①	②	③	④	⑤	⑥	⑦																	
<table border="1" style="margin-left: 0;"> <tr><td style="padding: 2px 5px;">1</td><td style="padding: 2px 5px;">-</td><td style="padding: 2px 5px;">Current Rating (20 = 20A)</td></tr> <tr><td style="padding: 2px 5px;">2</td><td style="padding: 2px 5px;">-</td><td style="padding: 2px 5px;">Circuit Configuration: E = Single Diode</td></tr> <tr><td style="padding: 2px 5px;">3</td><td style="padding: 2px 5px;">-</td><td style="padding: 2px 5px;">Package: T = TO-220AC</td></tr> <tr><td style="padding: 2px 5px;">4</td><td style="padding: 2px 5px;">-</td><td style="padding: 2px 5px;">Type of Silicon: S = Standard Recovery Rectifier</td></tr> <tr><td style="padding: 2px 5px;">5</td><td style="padding: 2px 5px;">-</td><td style="padding: 2px 5px;">Voltage Ratings</td></tr> <tr><td style="padding: 2px 5px;">6</td><td style="padding: 2px 5px;">-</td><td style="padding: 2px 5px;">Fullpak</td></tr> <tr><td style="padding: 2px 5px;">7</td><td style="padding: 2px 5px;">-</td><td style="padding: 2px 5px;"> <ul style="list-style-type: none"> • none = Standard Production • PbF = Lead-Free </td></tr> </table>	1	-	Current Rating (20 = 20A)	2	-	Circuit Configuration: E = Single Diode	3	-	Package: T = TO-220AC	4	-	Type of Silicon: S = Standard Recovery Rectifier	5	-	Voltage Ratings	6	-	Fullpak	7	-	<ul style="list-style-type: none"> • none = Standard Production • PbF = Lead-Free 	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td style="padding: 5px;">12 = 1200V 08 = 800V</td> </tr> </table>	12 = 1200V 08 = 800V
1	-	Current Rating (20 = 20A)																					
2	-	Circuit Configuration: E = Single Diode																					
3	-	Package: T = TO-220AC																					
4	-	Type of Silicon: S = Standard Recovery Rectifier																					
5	-	Voltage Ratings																					
6	-	Fullpak																					
7	-	<ul style="list-style-type: none"> • none = Standard Production • PbF = Lead-Free 																					
12 = 1200V 08 = 800V																							

Data and specifications subject to change without notice.
 This product has been designed and qualified for Industrial Level and Lead-Free.
 Qualification Standards can be found on IR's Web site.